


PRODUCT SPECIFICATIONS

PROGENTEX DRSI Grade III series of dissipative/reactive intake silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing of a dissipative silencer for high-frequency noise. This combination enables our DRSI Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Compressors
- Dry Vacuum Pumps (*Below 20" Hg*)
- Rotary Positive Blowers (*Above Transition Speed*)
- Turbocharged Reciprocating Engines

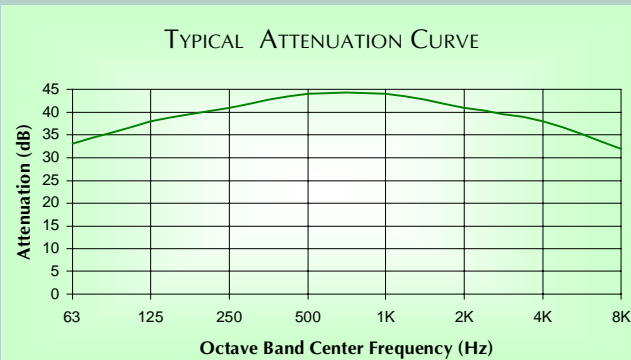


COMPETITIVE CROSS-REFERENCE			
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
GROUP	BEOA	---	---
SERIES	BEOA	---	---

TOP VIEW



SIDE VIEW

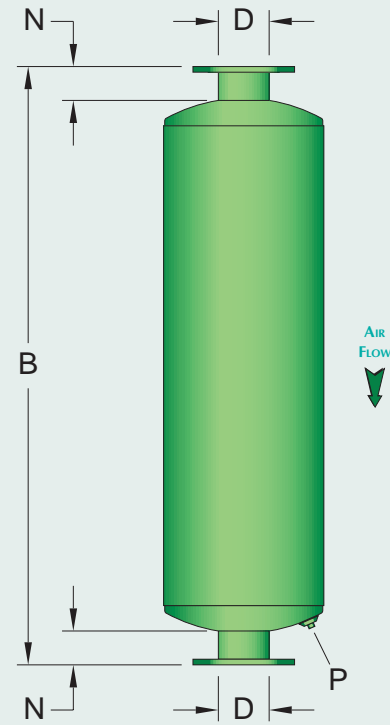

DRSI GRADE III

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	N	P (NOM.)	WEIGHT
DRSI-1 GRADE III	1					
DRSI-1 1/2 GRADE III	1 1/2					
DRSI-2 GRADE III	2	SIZES 1" TO 3 1/2": USE RSI GRADE III OR DRSI GRADE II SERIES				
DRSI-2 1/2 GRADE III	2 1/2	(SEE SPEC SHEET N-02301-01 OR D-03201-01)				
DRSI-3 GRADE III	3					
DRSI-3 1/2 GRADE III	3 1/2					
DRSI-4 GRADE III	4	14	66	3	1/2	135
DRSI-5 GRADE III	5	16	78	3	1/2	325
DRSI-6 GRADE III	6	18	97	3	1/2	580
DRSI-8 GRADE III	8	24	110	3 1/2	1	625
DRSI-10 GRADE III	10	30	136	3 1/2	1	1,050
DRSI-12 GRADE III	12	36	143	3 1/2	1	1,375
DRSI-14 GRADE III	14	36	199	3 1/2	1	1,900
DRSI-16 GRADE III	16	42	213	3 1/2	1	2,750
DRSI-18 GRADE III	18	48	214	3 1/2	1 1/2	3,300

- 1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
- 2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).


Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.

PRODUCT SPECIFICATIONS

PROGENTEX DRSI-L Grade III series of dissipative/reactive intake silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing of a dissipative silencer for high-frequency noise. This combination enables our DRSI-L Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Compressors
- Dry Vacuum Pumps (*Below 20" Hg*)
- Rotary Positive Blowers (*Above Transition Speed*)
- Turbocharged Reciprocating Engines

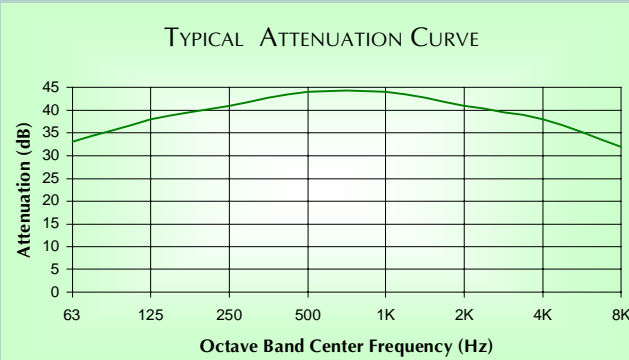


COMPETITIVE CROSS-REFERENCE			
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
GROUP	BEOA	---	---
SERIES	BEOA-L	---	---

TOP VIEW



SIDE VIEW

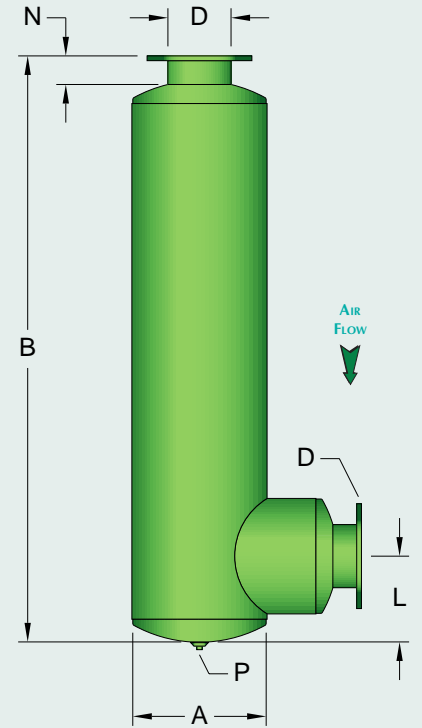

DRSI-L GRADE III

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	N	K	L		P (NOM.)	WEIGHT
						(MIN)	(MAX)		
DRSI-L-1 GRADE III	1								
DRSI-L-1 1/2 GRADE III	1 1/2								
DRSI-L-2 GRADE III	2	SIZES 1" TO 3 1/2": USE RSI-L GRADE III OR DRSI-L GRADE II SERIES							
DRSI-L-2 1/2 GRADE III	2 1/2	(SEE SPEC SHEET N-02302-01 OR N-03202-01)							
DRSI-L-3 GRADE III	3								
DRSI-L-3 1/2 GRADE III	3 1/2								
DRSI-L-4 GRADE III	4	14	63	3	14	8	16	1/2	135
DRSI-L-5 GRADE III	5	16	75	3	16	9	27	1/2	325
DRSI-L-6 GRADE III	6	18	94	3	24	10	45	1/2	580
DRSI-L-8 GRADE III	8	24	106 1/2	3 1/2	26	13	31	1	625
DRSI-L-10 GRADE III	10	30	132 1/2	3 1/2	31	15	37	1	1,050
DRSI-L-12 GRADE III	12	36	139 1/2	3 1/2	36	16	43	1	1,375
DRSI-L-14 GRADE III	14	36	195 1/2	3 1/2	42	18	65	1	1,900
DRSI-L-16 GRADE III	16	42	209 1/2	3 1/2	48	20	65	1	2,750
DRSI-L-18 GRADE III	18	48	210 1/2	3 1/2	53	22	65	1 1/2	3,300

- 1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
- 2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).


Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.

PRODUCT SPECIFICATIONS

PROGENTEX DRSI-LL Grade III series of dissipative/reactive intake silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing for a dissipative silencer for high-frequency noise. This combination enables our DRSI-LL Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Compressors
- Dry Vacuum Pumps (*Below 20" Hg*)
- Rotary Positive Blowers (*Above Transition Speed*)
- Turbocharged Reciprocating Engines

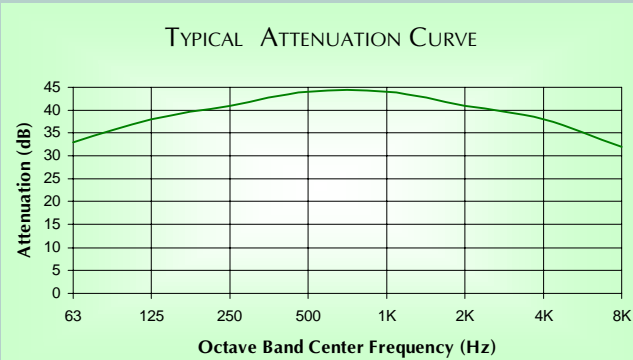


GROUP	COMPETITIVE CROSS-REFERENCE		
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
SERIES	BEOA	---	---
SERIES	BEOA-LL	---	---

TOP VIEW

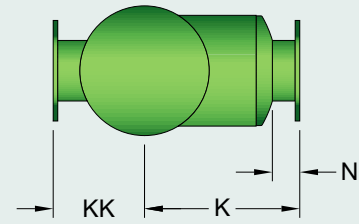

SIDE VIEW

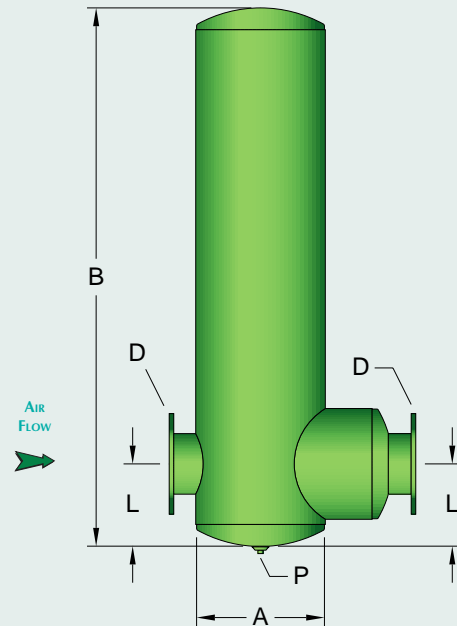

DRSI-LL GRADE III

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	N	K	KK	L		P (NOM.)	WEIGHT
							(MIN)	(MAX)		
DRSI-LL-1 GRADE III	1									
DRSI-LL-1 1/2 GRADE III	1 1/2									
DRSI-LL-2 GRADE III	2									
DRSI-LL-2 1/2 GRADE III	2 1/2									
DRSI-LL-3 GRADE III	3									
DRSI-LL-3 1/2 GRADE III	3 1/2									
DRSI-LL-4 GRADE III	4	14	60	3	14	10	8	11	1/2	135
DRSI-LL-5 GRADE III	5	16	72	3	16	11	9	18	1/2	325
DRSI-LL-6 GRADE III	6	18	91	3	24	12	10	18	1/2	580
DRSI-LL-8 GRADE III	8	24	103	3 1/2	26	15 1/2	13	20	1	625
DRSI-LL-10 GRADE III	10	30	129	3 1/2	31	18 1/2	15	22	1	1,050
DRSI-LL-12 GRADE III	12	36	136	3 1/2	36	21 1/2	16	26	1	1,375
DRSI-LL-14 GRADE III	14	36	192	3 1/2	42	21 1/2	18	39	1	1,900
DRSI-LL-16 GRADE III	16	42	206	3 1/2	48	24 1/2	20	39	1	2,750
DRSI-LL-18 GRADE III	18	48	207	3 1/2	53	27 1/2	22	39	1 1/2	3,300

1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).


Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.

PRODUCT SPECIFICATIONS

PROGENTEX DRSI-S Grade III series of dissipative/reactive intake silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing of a dissipative silencer for high-frequency noise. This combination enables our DRSI-S Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Compressors
- Dry Vacuum Pumps (*Below 20" Hg*)
- Rotary Positive Blowers (*Above Transition Speed*)
- Turbocharged Reciprocating Engines

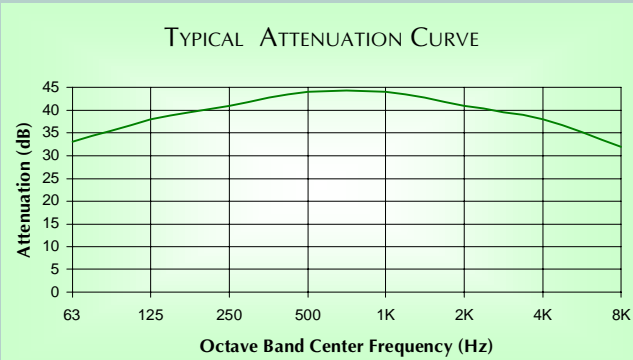


COMPETITIVE CROSS-REFERENCE			
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
GROUP	BEOA	---	---
SERIES	BEOA-S	---	---

TOP VIEW

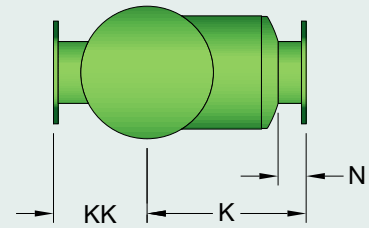

SIDE VIEW

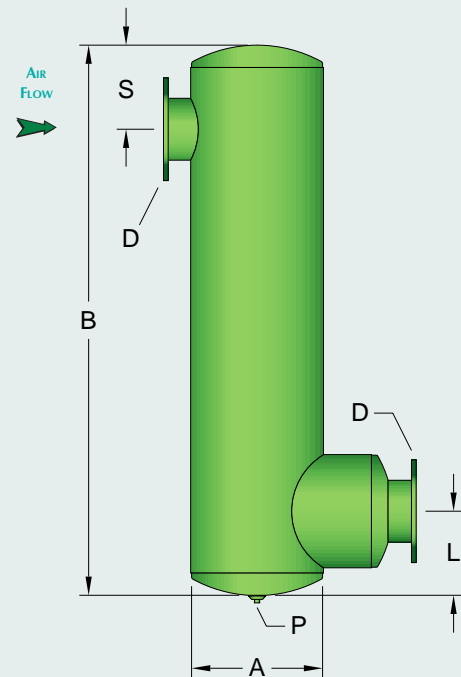

DRSI-S GRADE III

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	N	K	KK	L (MIN)	L (MAX)	S (MIN)	S (MAX)	P (NOM.)	WEIGHT
DRSI-S-1 GRADE III	1											
DRSI-S-1 1/2 GRADE III	1 1/2											
DRSI-S-2 GRADE III	2											
DRSI-S-2 1/2 GRADE III	2 1/2											
DRSI-S-3 GRADE III	3											
DRSI-S-3 1/2 GRADE III	3 1/2											
DRSI-S-4 GRADE III	4	14	60	3	14	10	8	16	6	12	1/2	135
DRSI-S-5 GRADE III	5	16	72	3	16	11	9	27	7	15	1/2	325
DRSI-S-6 GRADE III	6	18	91	3	24	12	10	34	8	24	1/2	580
DRSI-S-8 GRADE III	8	24	103	3 1/2	26	15 1/2	13	31	10	24	1	625
DRSI-S-10 GRADE III	10	30	129	3 1/2	31	18 1/2	15	37	12	30	1	1,050
DRSI-S-12 GRADE III	12	36	136	3 1/2	36	21 1/2	16	32	14	24	1	1,375
DRSI-S-14 GRADE III	14	36	192	3 1/2	42	21 1/2	18	42	16	32	1	1,900
DRSI-S-16 GRADE III	16	42	206	3 1/2	48	24 1/2	20	42	18	32	1	2,750
DRSI-S-18 GRADE III	18	48	207	3 1/2	53	27 1/2	22	42	19	32	1 1/2	3,300

- 1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
- 2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).
- 3) Connections can be rotated to accommodate orientation requirements.


Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.

PRODUCT SPECIFICATIONS

PROGENTEX DRSI-J Grade III series of dissipative/reactive intake silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing of a dissipative silencer for high-frequency noise. This combination enables our DRSI-J Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Compressors
- Dry Vacuum Pumps (*Below 20" Hg*)
- Rotary Positive Blowers (*Above Transition Speed*)
- Turbocharged Reciprocating Engines

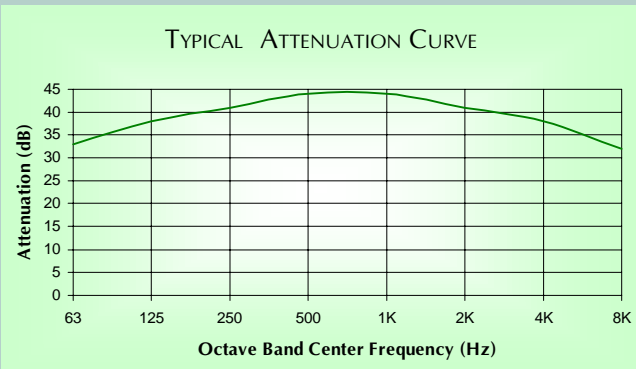


GROUP SERIES	COMPETITIVE CROSS-REFERENCE		
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
	BEOA	---	---
	---	---	---

TOP VIEW



SIDE VIEW

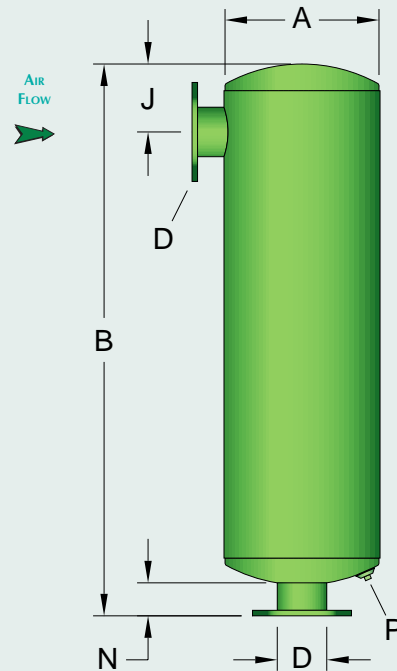

DRSI-J GRADE III

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	N	K	J		P (NOM.)	WEIGHT
						(MIN)	(MAX)		
DRSI-J-1 GRADE III	1								
DRSI-J-1 1/2 GRADE III	1 1/2								
DRSI-J-2 GRADE III	2	SIZES 1" TO 3 1/2": USE RSI-L GRADE III OR DRSI-L GRADE II SERIES							
DRSI-J-2 1/2 GRADE III	2 1/2	(SEE SPEC SHEET N-02302-01 OR N-03202-01)							
DRSI-J-3 GRADE III	3								
DRSI-J-3 1/2 GRADE III	3 1/2								
DRSI-J-4 GRADE III	4	14	63	3	10	6	12	1/2	135
DRSI-J-5 GRADE III	5	16	75	3	11	7	15	1/2	325
DRSI-J-6 GRADE III	6	18	94	3	12	8	24	1/2	580
DRSI-J-8 GRADE III	8	24	106 1/2	3 1/2	15 1/2	10	24	1	625
DRSI-J-10 GRADE III	10	30	132 1/2	3 1/2	18 1/2	12	30	1	1,050
DRSI-J-12 GRADE III	12	36	139 1/2	3 1/2	21 1/2	14	24	1	1,375
DRSI-J-14 GRADE III	14	36	195 1/2	3 1/2	21 1/2	16	32	1	1,900
DRSI-J-16 GRADE III	16	42	209 1/2	3 1/2	24 1/2	18	32	1	2,750
DRSI-J-18 GRADE III	18	48	210 1/2	3 1/2	27 1/2	19	32	1 1/2	3,300

1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).


Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.

PRODUCT SPECIFICATIONS

PROGENTEX DRSI-LP Grade III series of internally packed dissipative/reactive intake silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing of a dissipative silencer for high-frequency noise. This combination enables our DRSI-LP Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Compressors
- Dry Vacuum Pumps (*Below 20" Hg*)
- Rotary Positive Blowers (*Above Transition Speed*)
- Turbocharged Reciprocating Engines

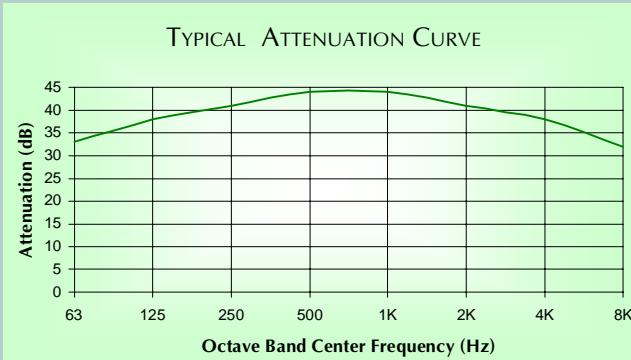


COMPETITIVE CROSS-REFERENCE			
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
GROUP	BEOA	---	---
SERIES	---	---	---

TOP VIEW



SIDE VIEW

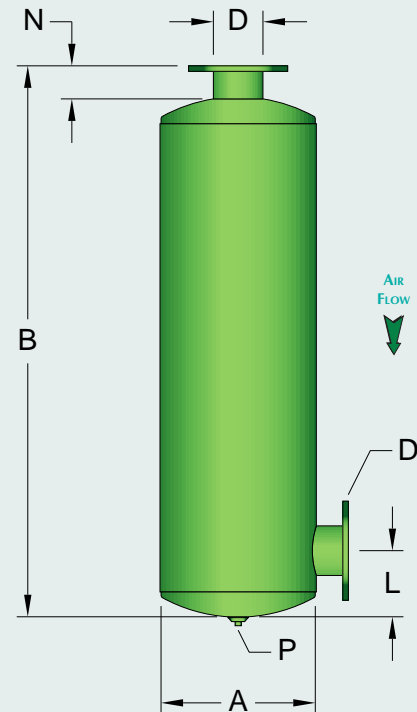

DRSI-LP GRADE III

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	N	K	L		P (NOM.)	WEIGHT
						(MIN)	(MAX)		
DRSI-LP-1 GRADE III	1								
DRSI-LP-1 1/2 GRADE III	1 1/2								
DRSI-LP-2 GRADE III	2	SIZES 1" to 3 1/2": USE RSI-L GRADE III OR DRSI-L GRADE II SERIES							
DRSI-LP-2 1/2 GRADE III	2 1/2	(SEE SPEC SHEET N-02302-01 OR N-03202-01)							
DRSI-LP-3 GRADE III	3								
DRSI-LP-3 1/2 GRADE III	3 1/2								
DRSI-LP-4 GRADE III	4	14	63	3	10	8	16	1/2	135
DRSI-LP-5 GRADE III	5	16	75	3	11	9	27	1/2	325
DRSI-LP-6 GRADE III	6	18	94	3	12	10	45	1/2	580
DRSI-LP-8 GRADE III	8	24	106 1/2	3 1/2	15 1/2	13	31	1	625
DRSI-LP-10 GRADE III	10	30	132 1/2	3 1/2	18 1/2	15	37	1	1,050
DRSI-LP-12 GRADE III	12	36	139 1/2	3 1/2	21 1/2	16	43	1	1,375
DRSI-LP-14 GRADE III	14	36	195 1/2	3 1/2	21 1/2	18	65	1	1,900
DRSI-LP-16 GRADE III	16	42	209 1/2	3 1/2	24 1/2	20	65	1	2,750
DRSI-LP-18 GRADE III	18	48	210 1/2	3 1/2	27 1/2	22	65	1 1/2	3,300

- 1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
- 2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).


Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.

PRODUCT SPECIFICATIONS

PROGENTEX DRSI-LLP Grade III series of internally packed dissipative/reactive intake silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing of a dissipative silencer for high-frequency noise. This combination enables our DRSI-LLP Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Compressors
- Dry Vacuum Pumps (*Below 20" Hg*)
- Rotary Positive Blowers (*Above Transition Speed*)
- Turbocharged Reciprocating Engines

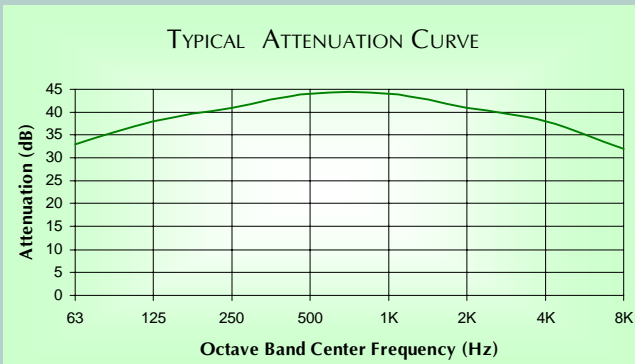


GROUP	COMPETITIVE CROSS-REFERENCE		
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
SERIES	BEOA	---	---

TOP VIEW



SIDE VIEW

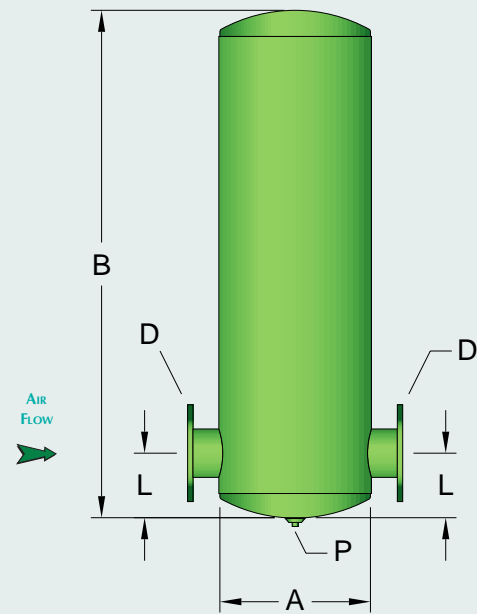

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	K	L		P (NOM.)	WEIGHT
					(MIN)	(MAX)		
DRSI-LLP-1 GRADE III	1							
DRSI-LLP-1 1/2 GRADE III	1 1/2							
DRSI-LLP-2 GRADE III	2	SIZES 1" TO 3 1/2": USE RSI-L GRADE III OR DRSI-L GRADE II SERIES						
DRSI-LLP-2 1/2 GRADE III	2 1/2	(SEE SPEC SHEET N-02302-01 OR N-03202-01)						
DRSI-LLP-3 GRADE III	3							
DRSI-LLP-3 1/2 GRADE III	3 1/2							
DRSI-LLP-4 GRADE III	4	14	60	10	8	11	1/2	135
DRSI-LLP-5 GRADE III	5	16	72	11	9	18	1/2	325
DRSI-LLP-6 GRADE III	6	18	91	12	10	18	1/2	580
DRSI-LLP-8 GRADE III	8	24	103	15 1/2	13	20	1	625
DRSI-LLP-10 GRADE III	10	30	129	18 1/2	15	22	1	1,050
DRSI-LLP-12 GRADE III	12	36	136	21 1/2	16	26	1	1,375
DRSI-LLP-14 GRADE III	14	36	192	21 1/2	18	39	1	1,900
DRSI-LLP-16 GRADE III	16	42	206	24 1/2	20	39	1	2,750
DRSI-LLP-18 GRADE III	18	48	207	27 1/2	22	39	1 1/2	3,300

- 1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
- 2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).


Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.

PRODUCT SPECIFICATIONS

PROGENTEX DRSI-SP Grade III series of internally packed dissipative/reactive intake silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing of a dissipative silencer for high-frequency noise. This combination enables our DRSI-SP Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Compressors
- Dry Vacuum Pumps (*Below 20" Hg*)
- Rotary Positive Blowers (*Above Transition Speed*)
- Turbocharged Reciprocating Engines

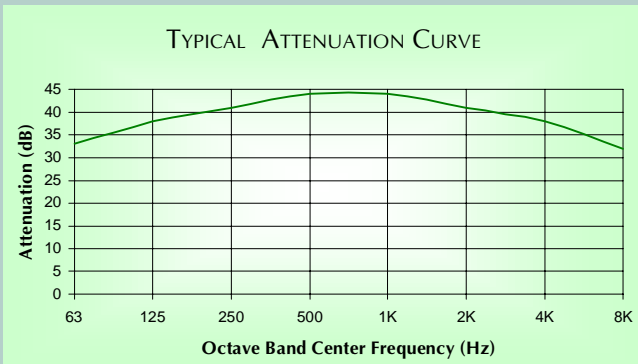


GROUP SERIES	COMPETITIVE CROSS-REFERENCE		
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
BEOA	---	---	---
---	---	---	---

TOP VIEW



SIDE VIEW

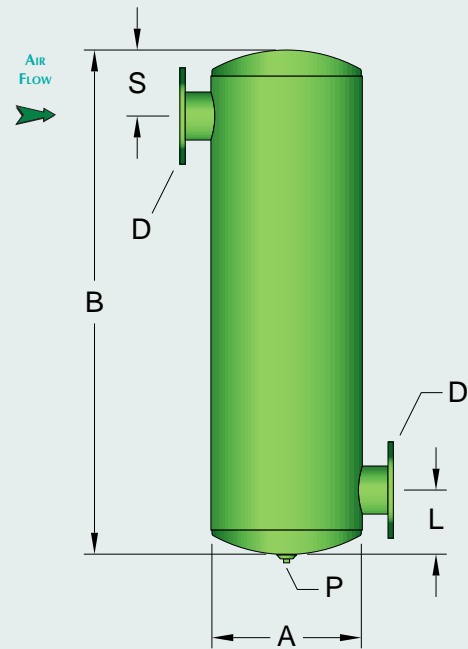

DRSI-SP GRADE III

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	K	L		S		P (NOM.)	WEIGHT
					(MIN)	(MAX)	(MIN)	(MAX)		
DRSI-SP-1 GRADE III	1									
DRSI-SP-1 1/2 GRADE III	1 1/2									
DRSI-SP-2 GRADE III	2				SIZES 1" TO 3 1/2": USE RSI-L GRADE III OR DRSI-L GRADE II SERIES					
DRSI-SP-2 1/2 GRADE III	2 1/2				(SEE SPEC SHEET N-02302-01 OR N-03202-01)					
DRSI-SP-3 GRADE III	3									
DRSI-SP-3 1/2 GRADE III	3 1/2									
DRSI-SP-4 GRADE III	4	14	60	10	8	16	6	12	1/2	135
DRSI-SP-5 GRADE III	5	16	72	11	9	27	7	15	1/2	325
DRSI-SP-6 GRADE III	6	18	91	12	10	34	8	24	1/2	580
DRSI-SP-8 GRADE III	8	24	103	15 1/2	13	31	10	24	1	625
DRSI-SP-10 GRADE III	10	30	129	18 1/2	15	37	12	30	1	1,050
DRSI-SP-12 GRADE III	12	36	136	21 1/2	16	32	14	24	1	1,375
DRSI-SP-14 GRADE III	14	36	192	21 1/2	18	42	16	32	1	1,900
DRSI-SP-16 GRADE III	16	42	206	24 1/2	20	42	18	32	1	2,750
DRSI-SP-18 GRADE III	18	48	207	27 1/2	22	42	19	32	1 1/2	3,300

- 1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
- 2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).
- 3) Connections can be rotated to accommodate orientation requirements.


Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.

PRODUCT SPECIFICATIONS

PROGENTEX DRS Grade III series of dissipative/reactive discharge silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing of a dissipative silencer for high-frequency noise. This combination enables our DRS Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Dry Vacuum Pumps
- Rotary Positive Blowers (*Above Transition Speed*)
- Steam/Air Ejectors
- Vents/Blowdowns (*Below 15 PSIG*)

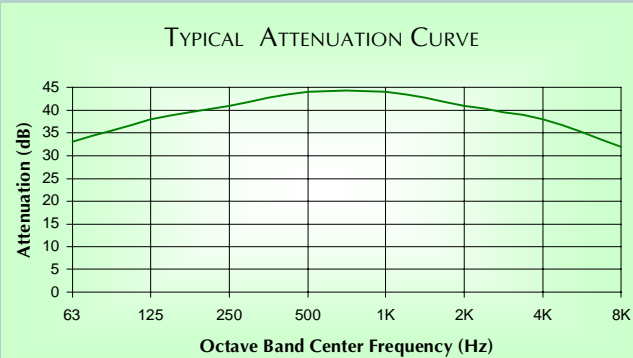


GROUP	COMPETITIVE CROSS-REFERENCE		
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
SERIES	BEOA	---	---

TOP VIEW



SIDE VIEW

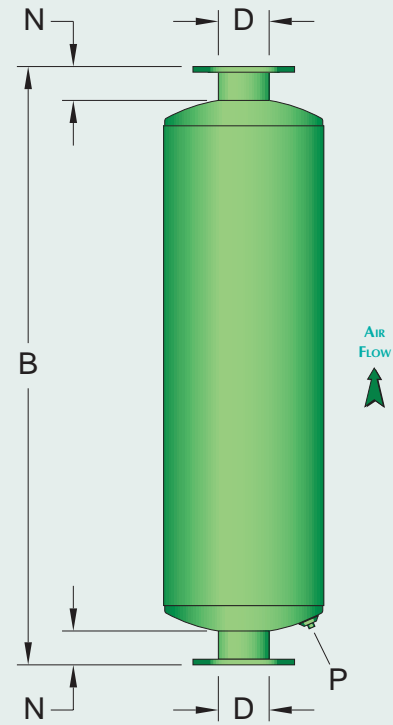

DRS GRADE III

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	N	P (NOM.)	WEIGHT
DRS-1 GRADE III	1					
DRS-1 1/2 GRADE III	1 1/2					
DRS-2 GRADE III	2	SIZES 1" TO 3 1/2": USE RS GRADE III OR DRS GRADE II SERIES				
DRS-2 1/2 GRADE III	2 1/2	(SEE SPEC SHEET D-02301-01 OR D-03201-01)				
DRS-3 GRADE III	3					
DRS-3 1/2 GRADE III	3 1/2					
DRS-4 GRADE III	4	14	66	3	1/2	135
DRS-5 GRADE III	5	16	78	3	1/2	325
DRS-6 GRADE III	6	18	97	3	1/2	580
DRS-8 GRADE III	8	24	110	3 1/2	1	625
DRS-10 GRADE III	10	30	136	3 1/2	1	1,050
DRS-12 GRADE III	12	36	143	3 1/2	1	1,375
DRS-14 GRADE III	14	36	199	3 1/2	1	1,900
DRS-16 GRADE III	16	42	213	3 1/2	1	2,750
DRS-18 GRADE III	18	48	214	3 1/2	1 1/2	3,300

- 1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
- 2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).


Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.

PRODUCT SPECIFICATIONS

PROGENTEX DRS-L Grade III series of dissipative/reactive discharge silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing of a dissipative silencer for high-frequency noise. This combination enables our DRS-L Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Dry Vacuum Pumps
- Rotary Positive Blowers (*Above Transition Speed*)
- Steam/Air Ejectors
- Vents/Blowdowns (*Below 15 PSIG*)

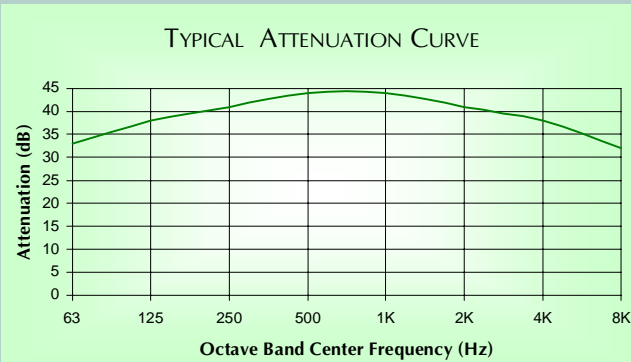


COMPETITIVE CROSS-REFERENCE			
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
GROUP	BEOA	---	---
SERIES	BEOA-L	---	---

TOP VIEW



SIDE VIEW

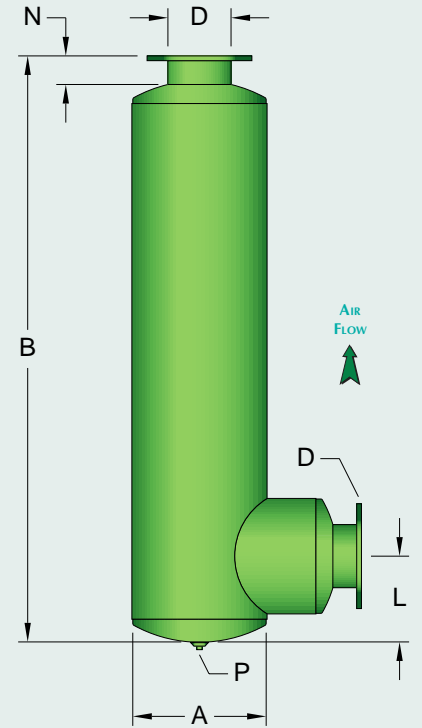

DRS-L GRADE III

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	N	K	L		P (NOM.)	WEIGHT
						(MIN)	(MAX)		
DRS-L-1 GRADE III	1								
DRS-L-1 1/2 GRADE III	1 1/2								
DRS-L-2 GRADE III	2	SIZES 1" TO 3 1/2": USE RS-L GRADE III OR DRS-L GRADE II SERIES							
DRS-L-2 1/2 GRADE III	2 1/2	(SEE SPEC SHEET D-02302-01 OR D-03202-01)							
DRS-L-3 GRADE III	3								
DRS-L-3 1/2 GRADE III	3 1/2								
DRS-L-4 GRADE III	4	14	63	3	14	8	16	1/2	135
DRS-L-5 GRADE III	5	16	75	3	16	9	27	1/2	325
DRS-L-6 GRADE III	6	18	94	3	24	10	45	1/2	580
DRS-L-8 GRADE III	8	24	106 1/2	3 1/2	26	13	31	1	625
DRS-L-10 GRADE III	10	30	132 1/2	3 1/2	31	15	37	1	1,050
DRS-L-12 GRADE III	12	36	139 1/2	3 1/2	36	16	43	1	1,375
DRS-L-14 GRADE III	14	36	195 1/2	3 1/2	42	18	65	1	1,900
DRS-L-16 GRADE III	16	42	209 1/2	3 1/2	48	20	65	1	2,750
DRS-L-18 GRADE III	18	48	210 1/2	3 1/2	53	22	65	1 1/2	3,300

1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).


Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.

PRODUCT SPECIFICATIONS

PROGENTEX DRS-LL Grade III series of dissipative/reactive discharge silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing for a dissipative silencer for high-frequency noise. This combination enables our DRS-LL Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Dry Vacuum Pumps
- Rotary Positive Blowers (*Above Transition Speed*)
- Steam/Air Ejectors
- Vents/Blowdowns (*Below 15 PSIG*)

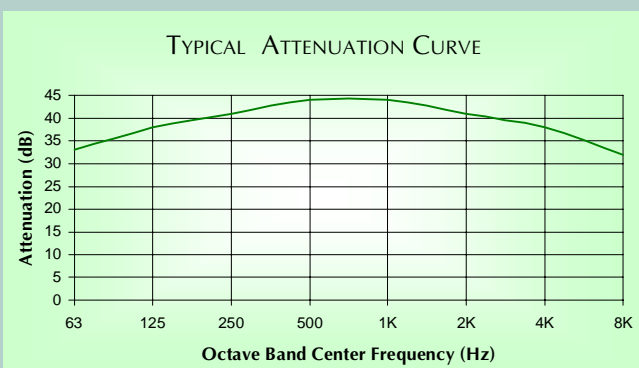


COMPETITIVE CROSS-REFERENCE			
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
GROUP	BEOA	---	---
SERIES	BEOA-LL	---	---

TOP VIEW



SIDE VIEW

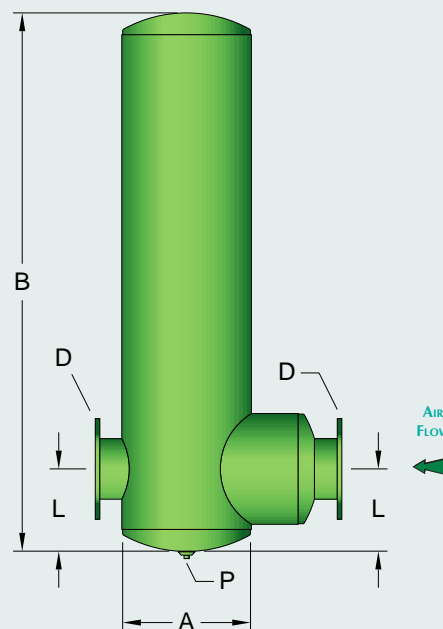

DRS-LL GRADE III

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	N	K	KK	L		P (NOM.)	WEIGHT
							(MIN)	(MAX)		
DRS-LL-1 GRADE III	1									
DRS-LL-1 1/2 GRADE III	1 1/2									
DRS-LL-2 GRADE III	2									
DRS-LL-2 1/2 GRADE III	2 1/2									
DRS-LL-3 GRADE III	3									
DRS-LL-3 1/2 GRADE III	3 1/2									
DRS-LL-4 GRADE III	4	14	60	3	14	10	8	11	1/2	135
DRS-LL-5 GRADE III	5	16	72	3	16	11	9	18	1/2	325
DRS-LL-6 GRADE III	6	18	91	3	24	12	10	18	1/2	580
DRS-LL-8 GRADE III	8	24	103	3 1/2	26	15 1/2	13	20	1	625
DRS-LL-10 GRADE III	10	30	129	3 1/2	31	18 1/2	15	22	1	1,050
DRS-LL-12 GRADE III	12	36	136	3 1/2	36	21 1/2	16	26	1	1,375
DRS-LL-14 GRADE III	14	36	192	3 1/2	42	21 1/2	18	39	1	1,900
DRS-LL-16 GRADE III	16	42	206	3 1/2	48	24 1/2	20	39	1	2,750
DRS-LL-18 GRADE III	18	48	207	3 1/2	53	27 1/2	22	39	1 1/2	3,300

- 1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
- 2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).


Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.

PRODUCT SPECIFICATIONS

PROGENTEX DRS-S Grade III series of dissipative/reactive discharge silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing of a dissipative silencer for high-frequency noise. This combination enables our DRS-S Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Dry Vacuum Pumps
- Rotary Positive Blowers (*Above Transition Speed*)
- Steam/Air Ejectors
- Vents/Blowdowns (*Below 15 PSIG*)

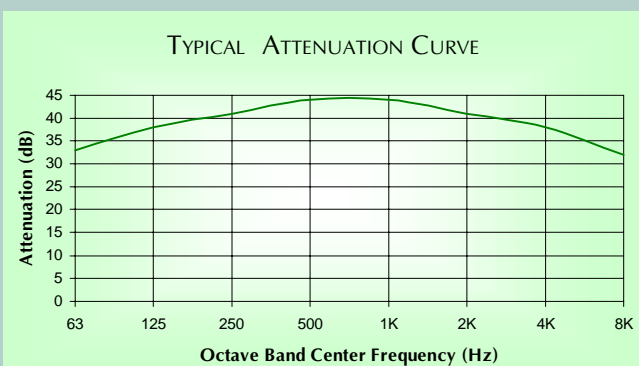


COMPETITIVE CROSS-REFERENCE			
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
GROUP	BEOA	---	---
SERIES	BEOA-S	---	---

TOP VIEW

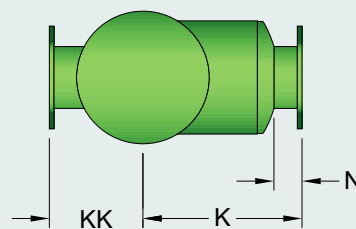

SIDE VIEW

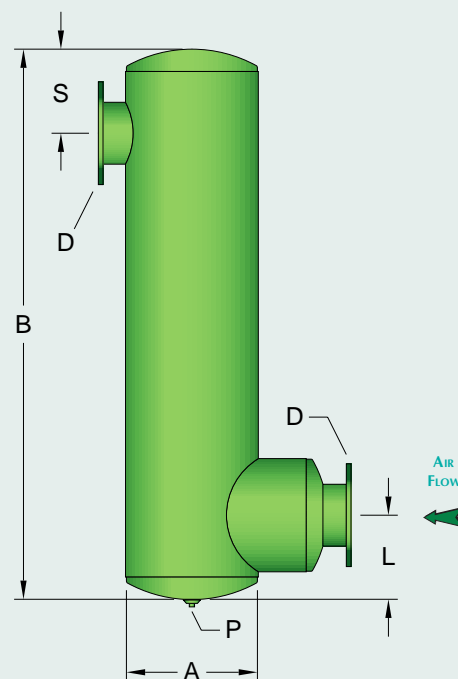

DRS-S GRADE III

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	N	K	KK	L		S		P (NOM.)	WEIGHT
							(MIN)	(MAX)	(MIN)	(MAX)		
DRS-S-1 GRADE III	1											
DRS-S-1 1/2 GRADE III	1 1/2											
DRS-S-2 GRADE III	2											
DRS-S-2 1/2 GRADE III	2 1/2											
DRS-S-3 GRADE III	3											
DRS-S-3 1/2 GRADE III	3 1/2											
DRS-S-4 GRADE III	4	14	60	3	14	10	8	16	6	12	1/2	135
DRS-S-5 GRADE III	5	16	72	3	16	11	9	27	7	15	1/2	325
DRS-S-6 GRADE III	6	18	91	3	24	12	10	34	8	24	1/2	580
DRS-S-8 GRADE III	8	24	103	3 1/2	26	15 1/2	13	31	10	24	1	625
DRS-S-10 GRADE III	10	30	129	3 1/2	31	18 1/2	15	37	12	30	1	1,050
DRS-S-12 GRADE III	12	36	136	3 1/2	36	21 1/2	16	32	14	24	1	1,375
DRS-S-14 GRADE III	14	36	192	3 1/2	42	21 1/2	18	42	16	32	1	1,900
DRS-S-16 GRADE III	16	42	206	3 1/2	48	24 1/2	20	42	18	32	1	2,750
DRS-S-18 GRADE III	18	48	207	3 1/2	53	27 1/2	22	42	19	32	1 1/2	3,300

- 1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
- 2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).
- 3) Connections can be rotated to accommodate orientation requirements.


Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.

PRODUCT SPECIFICATIONS

PROGENTEX DRS-J Grade III series of dissipative/reactive discharge silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing of a dissipative silencer for high-frequency noise. This combination enables our DRS-J Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Dry Vacuum Pumps
- Rotary Positive Blowers (*Above Transition Speed*)
- Steam/Air Ejectors
- Vents/Blowdowns (*Below 15 PSIG*)

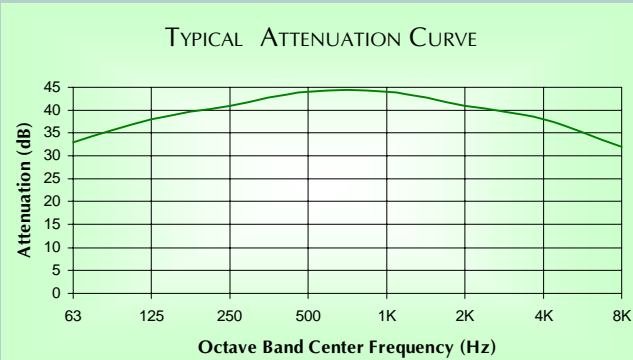


GROUP	COMPETITIVE CROSS-REFERENCE		
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
SERIES	BEOA	---	---

TOP VIEW



SIDE VIEW

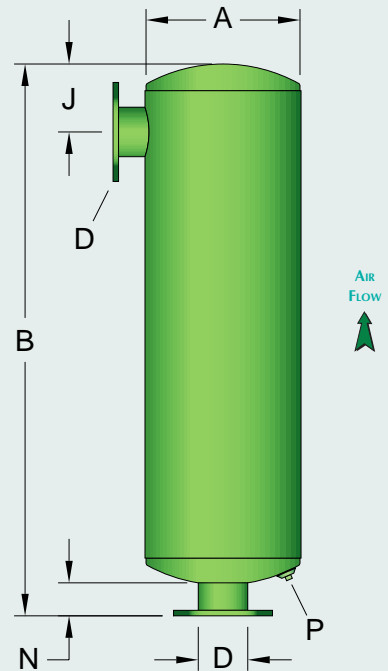

DRS-J GRADE III

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	N	K	J		P (NOM.)	WEIGHT
						(MIN)	(MAX)		
DRS-J-1 GRADE III	1								
DRS-J-1 1/2 GRADE III	1 1/2								
DRS-J-2 GRADE III	2	SIZES 1" TO 3 1/2": USE RS-L GRADE III OR DRS-L GRADE II SERIES							
DRS-J-2 1/2 GRADE III	2 1/2	(SEE SPEC SHEET D-02302-01 OR D-03202-01)							
DRS-J-3 GRADE III	3								
DRS-J-3 1/2 GRADE III	3 1/2								
DRS-J-4 GRADE III	4	14	63	3	10	6	12	1/2	135
DRS-J-5 GRADE III	5	16	75	3	11	7	15	1/2	325
DRS-J-6 GRADE III	6	18	94	3	12	8	24	1/2	580
DRS-J-8 GRADE III	8	24	106 1/2	3 1/2	15 1/2	10	24	1	625
DRS-J-10 GRADE III	10	30	132 1/2	3 1/2	18 1/2	12	30	1	1,050
DRS-J-12 GRADE III	12	36	139 1/2	3 1/2	21 1/2	14	24	1	1,375
DRS-J-14 GRADE III	14	36	195 1/2	3 1/2	21 1/2	16	32	1	1,900
DRS-J-16 GRADE III	16	42	209 1/2	3 1/2	24 1/2	18	32	1	2,750
DRS-J-18 GRADE III	18	48	210 1/2	3 1/2	27 1/2	19	32	1 1/2	3,300

1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).


Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.

PRODUCT SPECIFICATIONS

PROGENTEX DRS-LP Grade III series of internally packed dissipative/reactive discharge silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing of a dissipative silencer for high-frequency noise. This combination enables our DRS-LP Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Dry Vacuum Pumps
- Rotary Positive Blowers (*Above Transition Speed*)
- Steam/Air Ejectors
- Vents/Blowdowns (*Below 15 PSIG*)

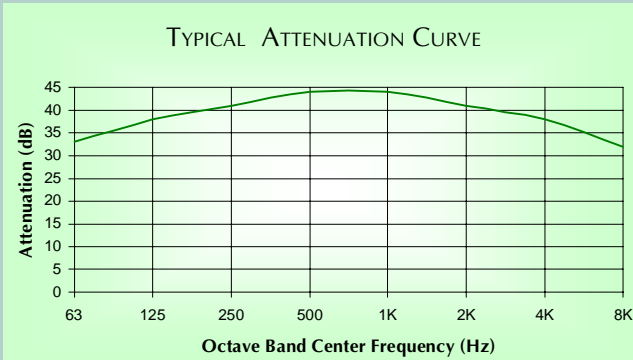


GROUP	COMPETITIVE CROSS-REFERENCE		
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
SERIES	BEOA	---	---

TOP VIEW



SIDE VIEW

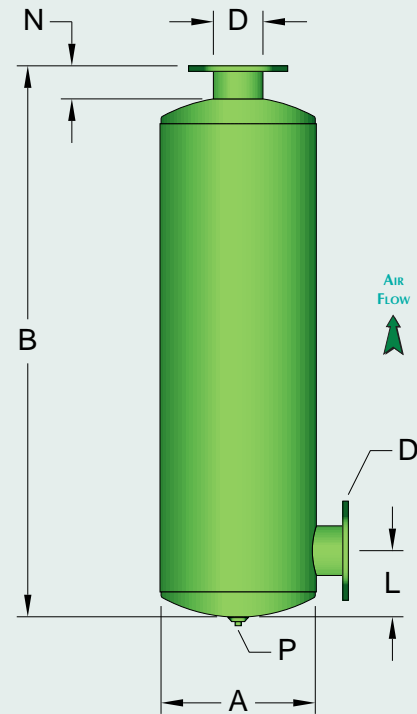

DRS-LP GRADE III

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	N	K	L		P (NOM.)	WEIGHT
						(MIN)	(MAX)		
DRS-LP-1 GRADE III	1								
DRS-LP-1 1/2 GRADE III	1 1/2								
DRS-LP-2 GRADE III	2	SIZES 1" TO 3 1/2": USE RS-L GRADE III OR DRS-L GRADE II SERIES							
DRS-LP-2 1/2 GRADE III	2 1/2	(SEE SPEC SHEET D-02302-01 OR D-03202-01)							
DRS-LP-3 GRADE III	3								
DRS-LP-3 1/2 GRADE III	3 1/2								
DRS-LP-4 GRADE III	4	14	63	3	10	8	16	1/2	135
DRS-LP-5 GRADE III	5	16	75	3	11	9	27	1/2	325
DRS-LP-6 GRADE III	6	18	94	3	12	10	45	1/2	580
DRS-LP-8 GRADE III	8	24	106 1/2	3 1/2	15 1/2	13	31	1	625
DRS-LP-10 GRADE III	10	30	132 1/2	3 1/2	18 1/2	15	37	1	1,050
DRS-LP-12 GRADE III	12	36	139 1/2	3 1/2	21 1/2	16	43	1	1,375
DRS-LP-14 GRADE III	14	36	195 1/2	3 1/2	21 1/2	18	65	1	1,900
DRS-LP-16 GRADE III	16	42	209 1/2	3 1/2	24 1/2	20	65	1	2,750
DRS-LP-18 GRADE III	18	48	210 1/2	3 1/2	27 1/2	22	65	1 1/2	3,300

- 1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
- 2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).


Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.

PRODUCT SPECIFICATIONS

PROGENTEX DRS-LLP Grade III series of internally packed dissipative/reactive discharge silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing of a dissipative silencer for high-frequency noise. This combination enables our DRS-LLP Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Dry Vacuum Pumps
- Rotary Positive Blowers (*Above Transition Speed*)
- Steam/Air Ejectors
- Vents/Blowdowns (*Below 15 PSIG*)

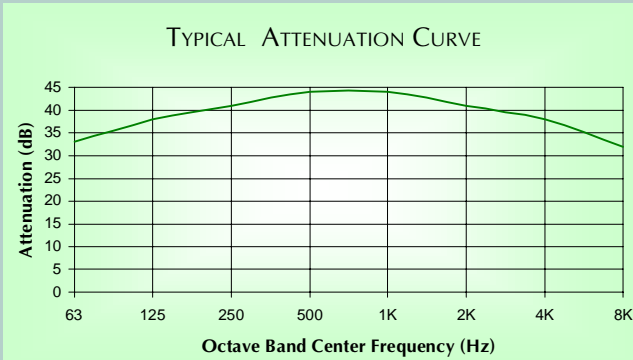


GROUP	COMPETITIVE CROSS-REFERENCE		
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
SERIES	BEOA	---	---

TOP VIEW



SIDE VIEW

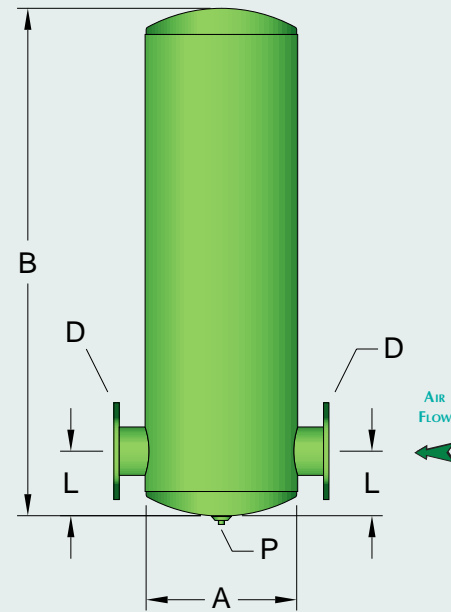

DRS-LLP GRADE III

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	K	L		P (NOM.)	WEIGHT
					(MIN)	(MAX)		
DRS-LLP-1 GRADE III	1							
DRS-LLP-1 1/2 GRADE III	1 1/2							
DRS-LLP-2 GRADE III	2	SIZES 1" TO 3 1/2": USE RS-L GRADE III OR DRS-L GRADE II SERIES						
DRS-LLP-2 1/2 GRADE III	2 1/2	(SEE SPEC SHEET D-02302-01 OR D-03202-01)						
DRS-LLP-3 GRADE III	3							
DRS-LLP-3 1/2 GRADE III	3 1/2							
DRS-LLP-4 GRADE III	4	14	60	10	8	11	1/2	135
DRS-LLP-5 GRADE III	5	16	72	11	9	18	1/2	325
DRS-LLP-6 GRADE III	6	18	91	12	10	18	1/2	580
DRS-LLP-8 GRADE III	8	24	103	15 1/2	13	20	1	625
DRS-LLP-10 GRADE III	10	30	129	18 1/2	15	22	1	1,050
DRS-LLP-12 GRADE III	12	36	136	21 1/2	16	26	1	1,375
DRS-LLP-14 GRADE III	14	36	192	21 1/2	18	39	1	1,900
DRS-LLP-16 GRADE III	16	42	206	24 1/2	20	39	1	2,750
DRS-LLP-18 GRADE III	18	48	207	27 1/2	22	39	1 1/2	3,300

- 1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
- 2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).


Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.

PRODUCT SPECIFICATIONS

PROGENTEX DRS-SP Grade III series of internally packed dissipative/reactive discharge silencers are designed for atmospheric applications requiring hospital/critical noise attenuation (40-50 dB). The multi-chambered design combines the chamber/tube configuration of a reactive silencer for low-frequency noise with the acoustic packing of a dissipative silencer for high-frequency noise. This combination enables our DRS-SP Grade III series to provide premium, wide-band noise reduction.


APPLICATIONS INCLUDE:

- Dry Vacuum Pumps
- Rotary Positive Blowers (*Above Transition Speed*)
- Steam/Air Ejectors
- Vents/Blowdowns (*Below 15 PSIG*)

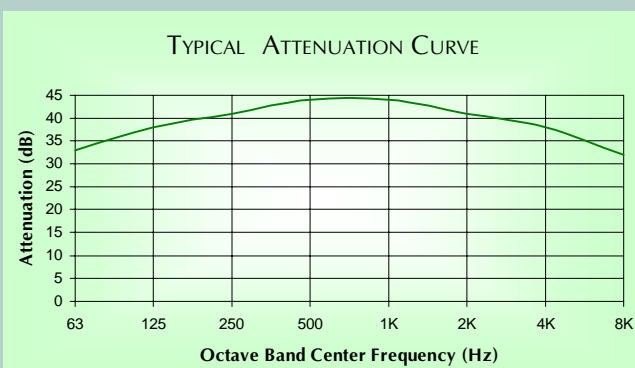


GROUP	COMPETITIVE CROSS-REFERENCE		
	BURGESS-MANNING	STODDARD	UNIVERSAL SILENCER
SERIES	BEOA	---	---

TOP VIEW



SIDE VIEW

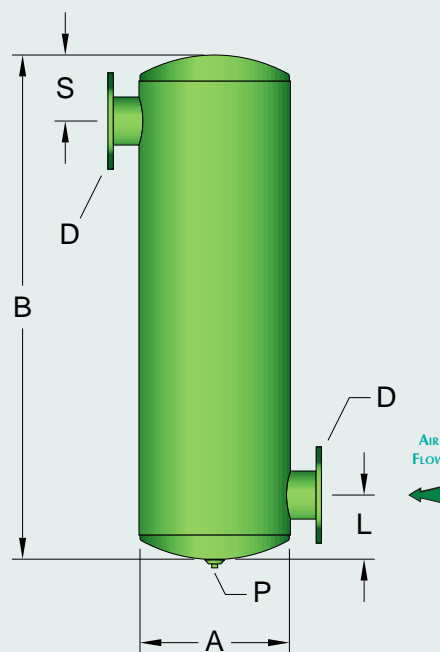

DRS-SP GRADE III

DIMENSIONS AND WEIGHTS

MODEL	D (NOM.)	A	B	K	L		S		P (NOM.)	WEIGHT
					(MIN)	(MAX)	(MIN)	(MAX)		
DRS-SP-1 GRADE III	1									
DRS-SP-1 1/2 GRADE III	1 1/2									
DRS-SP-2 GRADE III	2				SIZES 1" TO 3 1/2": USE RS-L GRADE III OR DRS-L GRADE II SERIES					
DRS-SP-2 1/2 GRADE III	2 1/2				(SEE SPEC SHEET D-02302-01 OR D-03202-01)					
DRS-SP-3 GRADE III	3									
DRS-SP-3 1/2 GRADE III	3 1/2									
DRS-SP-4 GRADE III	4	14	60	10	8	16	6	12	1/2	135
DRS-SP-5 GRADE III	5	16	72	11	9	27	7	15	1/2	325
DRS-SP-6 GRADE III	6	18	91	12	10	34	8	24	1/2	580
DRS-SP-8 GRADE III	8	24	103	15 1/2	13	31	10	24	1	625
DRS-SP-10 GRADE III	10	30	129	18 1/2	15	37	12	30	1	1,050
DRS-SP-12 GRADE III	12	36	136	21 1/2	16	32	14	24	1	1,375
DRS-SP-14 GRADE III	14	36	192	21 1/2	18	42	16	32	1	1,900
DRS-SP-16 GRADE III	16	42	206	24 1/2	20	42	18	32	1	2,750
DRS-SP-18 GRADE III	18	48	207	27 1/2	22	42	19	32	1 1/2	3,300

- 1) Standard design includes: All welded carbon steel construction, acoustic packing material rated for 350° F and standard shop coat primer.
- 2) Sizes 4" - 18": Standard 125/150# ANSI drilled plate flange inlet and discharge connections and include a tank flange drain (P).
- 3) Connections can be rotated to accommodate orientation requirements.

Mounting brackets, special finishes, relief connections and other options are available - contact ProGENTEX with requirements.