


ACCESSORIES

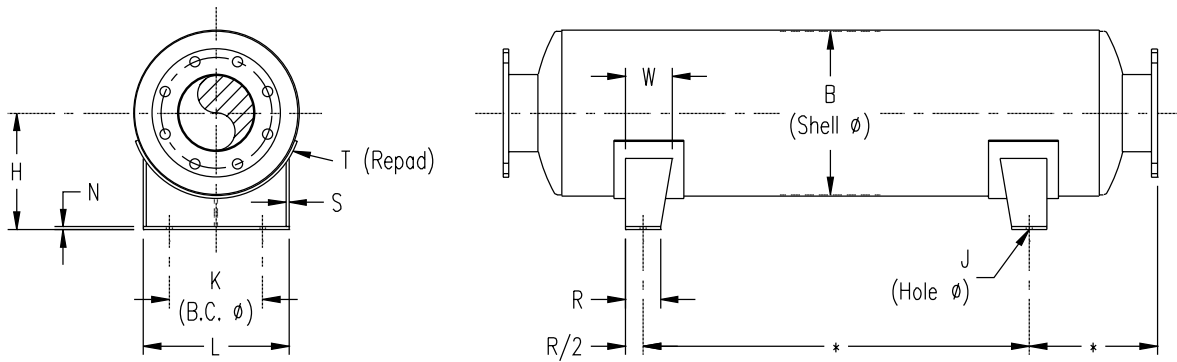

NOTES:

- 1) Saddle brackets of increased height and/or special design are available upon request.
 - 2) Saddle brackets are welded in place unless otherwise specified.
 - 3) Center rib added for unit diameters ranging from 60" to 72".
- * Dimensions are optional within limits of the product's overall length - reference applicable Spec Sheet for details.

DIMENSIONS AND WEIGHTS

B (SHELL DIA.)	REFERENCE	H	L	R	W	N	S	T	J (HOLE DIA.)	K (B.C. DIA.)	WEIGHT (PER BRACKET)
8	S150-E00080	7	7 1/2	3	3	1/4	1/4	---	1/2	4	5
10	S150-E00100	8	9 1/2	3	3	1/4	1/4	---	1/2	6	5
12	S150-E00120	9	10 1/2	4	4	1/4	1/4	---	1/2	7	5
14	S150-E00140	10	12 1/2	4	4	1/4	1/4	---	1/2	8	9
16	S150-E00160	11	14	4	4	1/4	1/4	---	1/2	10	9
18	S150-E00180	12	15 1/2	4	4	1/4	1/4	---	1/2	12	10
20	S150-E00200	13	17 1/2	4	4	1/4	1/4	---	1/2	13	10
22	S150-E00220	14	19	4	6	1/4	1/4	---	1/2	14	14
24	S150-E00240	15	21	4	6	1/4	1/4	---	1/2	15	15
26	S150-E00260	16	22 1/2	4	6	1/4	1/4	1/4	1/2	16	16
28	S150-E00280	17	24 1/2	4	6	1/2	1/4	1/4	1/2	17	17
30	S150-E00300	18	26	4	6	1/2	1/4	1/4	1/2	18	23
32	S150-E00320	19	28	4	6	1/2	1/4	1/4	1/2	19	32
36	S150-E00360	21	30 1/2	6	11	1/2	1/4	1/4	1/2	22	37
42	S150-E00420	24	36 1/2	6	11	1/2	3/8	3/8	3/4	28	41
48	S150-E00480	27	42	6	11	3/4	3/8	3/8	3/4	32	69
54	S150-E00540	30	47	6	11	3/4	3/8	3/8	3/4	36	123
60	S150-E00600	33	52	6	11	3/4	3/8	3/8	3/4	40	130
66	S150-E00660	36	57 1/2	6	11	3/4	3/8	3/8	3/4	44	136
72	S150-E00720	39	62 1/2	9	18	3/4	3/8	3/8	3/4	48	146